





TO SUPPORT YOU, WE DESIGN AND PRODUCE

An industrialized process with various levels of customization





ROBOTICS

For over 45 years, Rollon has adopted an approach entailing responsibility and ethics in the design and production of our linear motion solutions for different industrial sectors. The reliability of an international technology group has now been combined with the availability of a local support and service network

VALUES

Rollon's goal is to help our clients become more competitive in their markets through technological solutions, design simplification, productivity, reliability, duration, and low maintenance. PERFORMANCE







COLLABORATION

and transform them into guidelines for continuous exchange, whileour strong specialization in the different industrial sectors becomes an factor in developing projects and innovative applications. **SOLUTIONS APPLICATIONS**

Rollon takes on the task of design and development of linear motion solutions, taking care of everything for our customers, so that they can concentrate on their core business. We offer everything from individual components to specifically designed, mechanically integrated systems: the quality of our applications is an expression of our technology and competence.

MEDICAL

High-level technical consulting and cross-competence allow us

to identify the needs of our clients



SPECIAL VEHICLES

INTERIORS AND ARCHITECTURE



DIVERSIFIED LINEAR SOLUTIONS FOR EVERY APPLICATION REQUIREMENT

Linear and telescopic rails



Linear and curved rails with ball and roller bearings, with hardened raceways, high load capacity, self-alignment, and capable of working in dirty environments.

Telescopic Line

Telescopic rails with ball and roller bearings, with hardened raceways, high load capacities, low bending, resistant to shocks and vibrations. For partial, total or extended extraction up to 200% of the length of the guide.

Linear actuators and automation systems



Actuator Line

Linear actuators with different rail configurations and transmissions, available with belt, screw, or rack and pinion drives for different needs in terms of precision and speed. Rails with bearings or ball recycle systems for different load capacities and critical environments.

Actuator System Line

Integrated actuators for industrial automation, used in applications in several industrial sectors: automated industrial machinery, precision assembly lines, packaging lines and high speed production lines. The Actuator Line evolves to satisfy the requests of our most discerning clients.

Content


MiniRoller Rail



1 Product explanation Compact linear guide with rollers, induction hardened and honed raceways	MRR-2
2 Technical data MiniRoller Rail load capacities	MRR-5
3 Product dimensions MiniRoller width, Rail length Slider, Mounted sliders and rails	MRR-6 MRR-7
4 Accessories Rollers	MRR-8
5 Technical instructions Lubrication, Corrosion protection Preload, Setting the preload Speed and acceleration, Operating temperatures	MRR-9 MRR-10 MRR-11
6 Installation instructions Installation of two rails in parallel	MRR-12
Ordering key MiniRoller Rail slider system, Slider, Rail	MRR-13
Calculation formulas Static load Slider load Service life	MRR-14 MRR-15 MRR-18

MiniRoller Rail

An alternative to miniature ball guide in several industries and applications: **7 main advantages**.

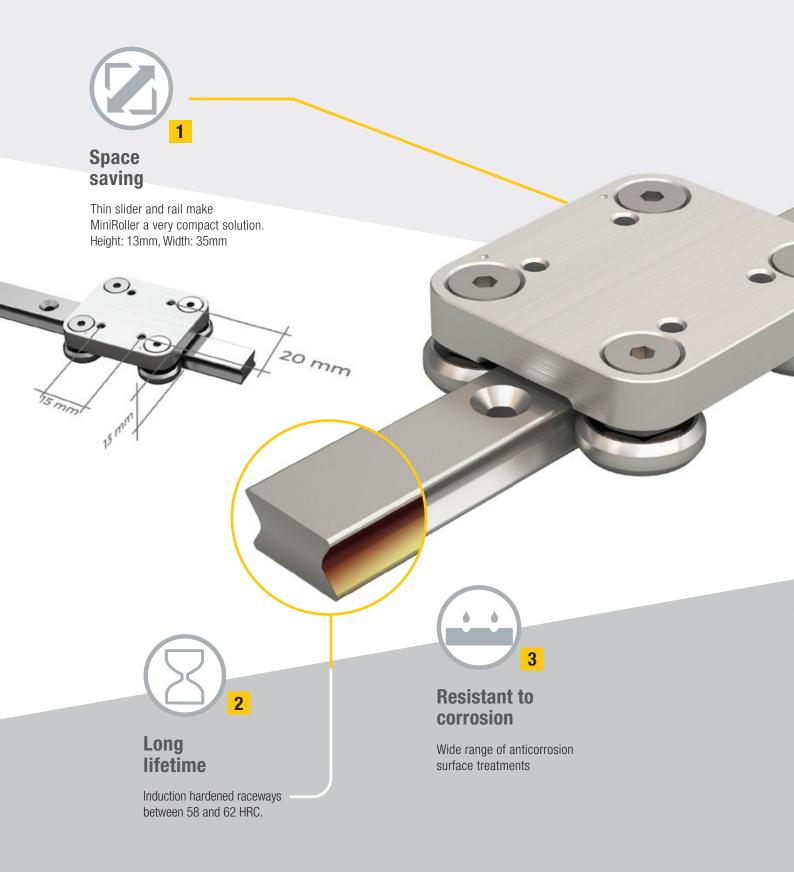

Easy installation

n

Eliminates the noise and difficult assembly associated with using mini ball guides.





Easy mounting Compensation of parallelism

deviation up to 0.03 mm.



Easy preload adjustment

Adjustable rollers preload to customize rolling force and motion characteristics.



Uniquely quiet

Honed raceways and roller bearings for smooth and silent motion.



Optimal reliability in dirty environments

Ideal for harsh environments as their large rolling components make them highly resistant to dust and dirt contamination.

Product explanation

Compact linear guide with rollers, induction hardened and honed raceways



MiniRoller Rail is a steel linear guide with compact design. It has radial roller bearings that glides on an induction hardened and honed raceway. It has been developed for applications that move moderate loads within tight spaces. MiniRoller Rail also manages parallelism deviation up to 0.03 mm.

The most important characteristics:

- Compact size
- Corrosion resistant surface
- Smooth motion
- Hardened and honed raceways surface
- Sliders with four rollers arranged in pairs
- Not sensitive to dirt due to the large rollers
- Low maintenance
- Quieter than recirculating ball systems
- MiniRoller Rail profile rails can be drop-in replace linear guides from another manufacturers while maintaining the same critical dimensions.

Preferred areas of application:

- Building and furniture
- Light handling machines, pick & place
- Special vehicles
- Diagnostic lab and liquid handling
- Pharmaceutical
- Food and beverage
- Interior design with special solutions
- Medical device manufacturing
- Vending & Kiosk machines

M R R

Rail:

Rails are made of cold-drawn carbon steel with electrolytic zinc-plated and passivated surface treatment as a standard corrosion protection. Other treatments are available for higher corrosion resistance, these include: zinc nickel and nickel plating. The raceways are induction hardened and honed for smoothness and maximizing the service life.

Sliders:

The slider body is made of steel DIN 95MnPb28 with electrolytic zincplated and passivated surface treatment. Stainless-steel version is available upon request. Rollers are paired with concentric and eccentric types, which enables firm contact with raceway for smooth operation.

Rollers:

Concentric and eccentric rollers comes with radial ball bearings made of steel or stainless steel as two different options. Roller bearing sealing options also comes with two different materials: 2RS rubber seals or 2Z steel shields. All roller bearings are lubricated for life.



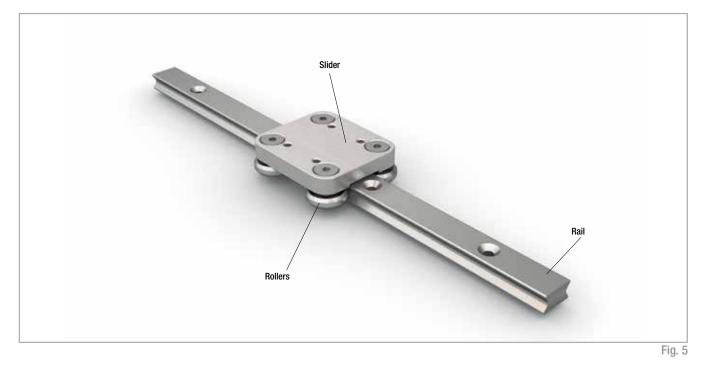


Fig. 3





Technical data 🏼 🖊 🗸



Performance characteristics:

- MiniRoller Rail available size: 11
- Max. slider operating speed on the rail: 3 m/s (118 in/s) (depending on application)
- Max. acceleration: 5 m/s² (196 in/s²) (depending on application)
- Available rail lengths up to 1950 mm (78.74 in)
- Temperature range: -20 °C to +120 °C (-4 °F to +248 °F) briefly up to max. +150 °C (+302 °F)
- Rail material: standard C43
- Rail raceways are induction hardened and honed
- Rails and slider bodies are standard electrolytic zinc-plated and passivated; increased anticorrosive protection on request (see pg. MRR-9 Anticorrosive protection)
- Slider body material: steel DIN 9SMnPb28, AISI 304 for the stainlesssteel version
- Rollers material: standard steel 100Cr6, AISI 440C stainless steel version.
- Rollers are lubricated for life
- Roller seal/shield: standard 2Z (steel cover disk), 2RS (splash-proof)
- Maximum parallelism deviation: 0.03 mm

Remarks:

- With a simple adjustment of the eccentric roller (denoted with a marking on the bottom of the roller), the slider preload can be set to a desired preload or clearance.
- Factory preload setting also available
- Various surface treatments available upon request

MiniRoller Rail load capacities





Fig. 6

Туре		Load capacities [N]			atic mome [Nm]	nts
	C [N]	C _{0rad} [N]	C _{oax} [N]	M _x [Nm]	M _y [Nm]	M _z [Nm]
SMR11	1530	820	375	2.3	5.9	10.3
						Tab. 1



Rail width

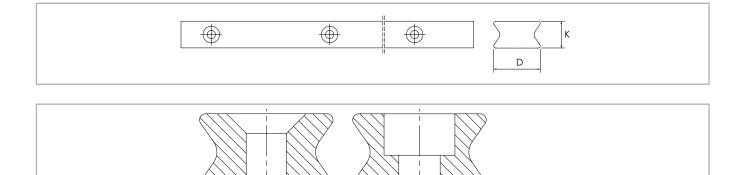

 C^2

 1 Fixing holes (V) for countersunk 90 degrees head screws according to DIN 7991 2 Fixing holes (C) for socket cap screws according to DIN 912

Туре	D [mm]	K [mm]	C²	V	Weight [kg/m]
RMR	11.3	6.5	M3	M3	0.48
					Tab. 2

 V^1

≥ Rail length

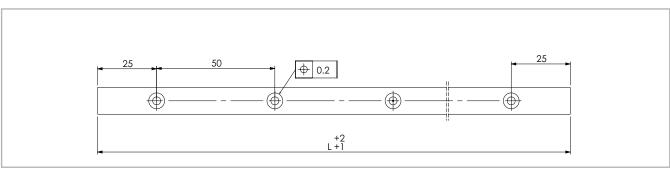



Fig. 7

Fig. 6

Туре	Size	Min length [mm]	Max length [mm]	Available standard lengths L [mm]
RMR	11	150	1950	150 - 200 - 250 - 300 - 350 - 400 - 450 - 500 - 550 - 600 - 650 - 700 - 750 - 800 - 850 - 900 - 950 - 1000 - 1050 - 1100 -1150 - 1200 - 1250 - 1300 - 1350 - 1400 - 1450 - 1500 - 1550 - 1600 - 1650 - 1700 - 1750 - 1800 - 1850 - 1900 - 1950


Tab. 3

Slider

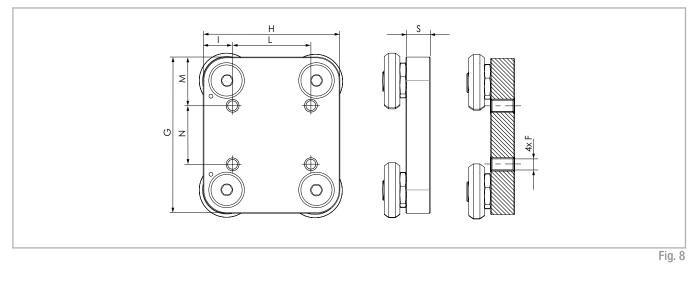

Туре	G [mm]	H [mm]	N [mm]	L [mm]	M [mm]	l [mm]	S [mm]	F	Weight [kg]
SMR11	39	35	15	20	12	7.5	6.2	M3	0.08
									Tab. 4


Mounted sliders and rails

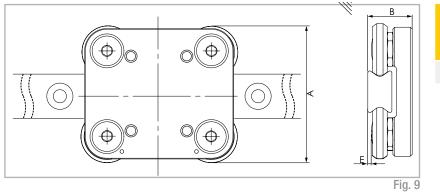

Configuration	A [mm]	B [mm]	E [mm]
ZK-RMR	38	13	0.75
			Tab. 5

Accessories

Rollers



Seals: 2RS is the splash-proof seal, 2Z is the steel cover disc Note: The rollers are lubricated for life

Туре	A			В	D	e	, H	, K	G	F	С	C _{Orad}	Weight
Inox	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		נואן	נואן	[kg]		
CXPNX18-2RS	14	4	6	-	1.55	1.8	5.5	M4	765	410	0.004		
-	14	4	6	-	1.55	1.8	5.5	M4	765	410	0.004		
CXPAX18-2RS	14	4	6	0.4	1.55	1.8	5.5	M4	765	410	0.004		
-	14	4	6	0.4	1.55	1.8	5.5	M4	765	410	0.004		
	Inox CXPNX18-2RS - CXPAX18-2RS	Inox [mm] CXPNX18-2RS 14 - 14 CXPAX18-2RS 14	Inox [mm] [mm] CXPNX18-2RS 14 4 - 14 4 CXPAX18-2RS 14 4	Inox [mm] [mm] [mm] CXPNX18-2RS 14 4 6 - 14 4 6 CXPAX18-2RS 14 4 6	Inox [mm] [mm] [mm] [mm] CXPNX18-2RS 14 4 6 - - 14 4 6 - CXPAX18-2RS 14 4 6 0.4	Inox [mm] [mm] <th< th=""><th>Inox Imm] <th< th=""><th>Inox [mm] <th< th=""><th>Inox [mm] [m] [m]<th>Inox [mm] [m] [m]</th></th></th<><th>Inox Imm] <th< th=""></th<></th></th></th<></th></th<>	Inox Imm] Imm] <th< th=""><th>Inox [mm] <th< th=""><th>Inox [mm] [m] [m]<th>Inox [mm] [m] [m]</th></th></th<><th>Inox Imm] <th< th=""></th<></th></th></th<>	Inox [mm] [mm] <th< th=""><th>Inox [mm] [m] [m]<th>Inox [mm] [m] [m]</th></th></th<> <th>Inox Imm] <th< th=""></th<></th>	Inox [mm] [m] [m] <th>Inox [mm] [m] [m]</th>	Inox [mm] [m] [m]	Inox Imm] Imm] <th< th=""></th<>		

Tab. 6

Technical Instructions

Lubrication

Roller lubrication

All roller bearings of the MiniRoller rail are lubricated for life.

Lubrication of the raceways

Rails must be lubricated before operation. Recommended lubrication intervals are heavily dependent upon the ambient conditions, speed, and temperature. Under normal conditions, lubrication is recommended after 100 km operational performance or after an operating period of six months whichever comes first. In critical application cases the interval should be shorter. Please clean the raceways carefully before lubrication. We recommend a high quality roller bearing grease lubricant consisting of mineral oil with a white lithium soap base of NLGI 2 grade.

Proper lubrication during normal conditions:

- reduces friction
- reduces wear
- reduces running noise

Different lubricants are available by request for special applications:

- FDA-approved lubricant for use in the food industry
- specific lubricant for clean rooms
- specific lubricant for the marine technology sector
- specific lubricant for high and low temperatures
- For specific information, contact Rollon technical support.

Corrosion protection

The MiniRoller rails and slider bodies comes standard with electrolytic zinc plating with passivation for anticorrosion protection. If increased corrosion protection is required, application-specific surface treatments are available upon request for rails e.g. approved nickel plating for use in the

food industry. In this case, the chosen treatment must be specified in the order rails using the appropriate code shown in the table below. For more information contact Rollon technical support.

Treatment	Characteristics
Electrolytic zinc plating with passivation	The treatment is commonly used in sectors where a major corrosion resistance is required. The layer of the treatment is removed, and the raceways are protected with post-honing oil.
ZincNickel ISO19598 (Z)	Ideal for outdoor applications. Stainless steel sliders are ideal combined with zinc nickel rails.
Nickel Plating (N)	Provides high resistance to chemical corrosion and is ideal for applications in medical or food related environments. The raceways comes with Nickel plating treatment. Stainless steel sliders are ideal combined with nickel plated rails.

Tab. 7

M R R

Preload

Preload classes

The factory installed systems, consisting of rails and sliders, are available in two preload classes:

Standard preload K1 means a rail-slider combination with minimum preload which means the rollers are adjusted free of clearance for optimal running properties.

Usually preload K2 is used for rail-slider systems for increasing the rigidity. When using a system with K2 preload a reduction of the loading capacities and service life must be taken into consideration (see tab. 8).

This coefficient y is used in the calculation formula for checking the static load and lifetime (see pg. MRR-14, fig. 16). The interference is the difference between the contact lines of the rollers and the raceways of the rail.

Preload class	Reduction y
K1	-
К2	0.1
	Tab. 8

Rail size	Preload class	Interference* [mm]			
11	K1	0.01			
11	K2	0.03			
* Measured on the largest outer dimension between the raceways					

Setting the preload



Туре **Tightening torque** [Nm] ZK-RMR... 3 Tab. 10

Fig. 12

If the MiniRoller rails are delivered as a system, the sliders are already set with no clearance. In this case the fixing screws are secured with thread locking glue at the factory.

If delivered separately, or if the sliders should be installed in another track, the eccentric roller pins must be readjusted. Important: The fixing screws must be additionally glued against loosening. The following points must also be observed:

- н. Use thread locking glue for fixing screws against coming loose.
- Wipe the raceways of any dirt and debris.
- Slightly loosen the fixing screws of the roller mounting. The eccentric roller pins are marked on the bottom.
- Position the slider(s) at the ends of the rail.
- The special flat key provided is inserted from the side onto the hexagon of the roller to be set (see fig. 12).

- By turning the flat key clockwise the roller is pressed against the raceway and thus reduces the clearance. Observe that with increasing preload, the friction is also increased and thus the service life reduced.
- Hold the roller pin with the adjustment key in the desired position and carefully tighten the fixing screw.
- Move the slider on the rail and check the preload over the entire length of the rail. It should move easily and the slider should not have play at any location of the rail.
- Now tighten the fixing screws with the specified tightening torque (see tab. 10), while the flat key holds the angle adjustment of the pin. A special thread in the roller pin secures the set position.

Speed and acceleration

The MiniRoller rail is suitable for low-to-moderate operating speeds and accelerations.

Size	Speed [m/s]	Acceleration [m/s ²]
11	3	5
		Tab. 11

Operating temperatures


The temperature range for continuous operation is: -20 °C / +120 °C with occasional peaks up to +150 °C.



Installation of two rails in parallel

If two MiniRoller rails are installed, the height difference of the two rails must not exceed a certain value (obtainable from the table below) in order to ensure proper guiding. These maximum values result from the maximum allowable twisting angle of the rollers in the raceways (see tab. 12).






Example:

if a = 500 mm; $b = a^{tan} \alpha = 0.5$ mm


When using two rails, the maximum parallelism deviation must not be exceeded (see tab. 13). Otherwise stresses can occur, which can result in a reduction in load capacity and service life.

Size	К1	К2
11	0.03	0.02
		Tab. 13

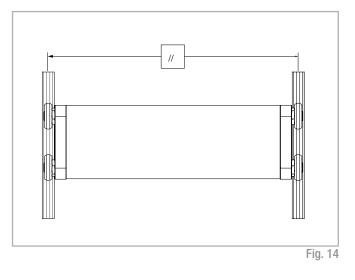



Rail / Slider system

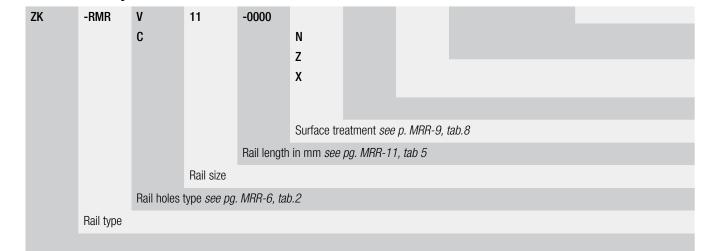


Ordering example: ZK-RMRV11-1950-N

Slider

SMR11	-4	- 2Z				
SMRX11		- 2RS				
		Roller type (22	Z, 2RS) <i>see pg. MRR-8, tab. 7</i>			
Number of rollers						
Slider Type (X=Stainless steel)						
Ordering example:						

SMR11-4-2Z

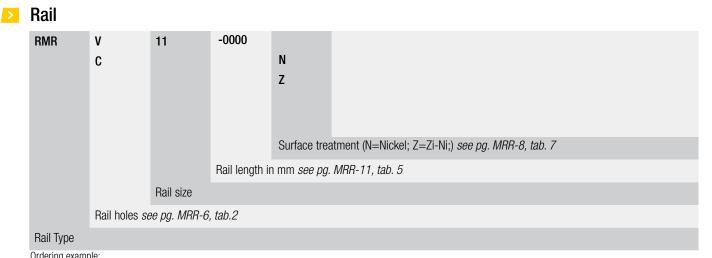

Calculation formulas

Static load

The radial load capacity rating, C_{0rad} the axial load capacity rating C_{0ax} , and moments M_x , M_y , M_z indicate the maximum permissible values of the load (see pg. MRR-5), higher loads will have a detrimental effect on the running quality. A safety factor, S_0 , is used to check the static load, which takes into account the basic parameters of the application and is defined more in detail in the following table:

Safety factor S ₀	
No shock nor vibration, smooth and low-frequency reverse, high assembly accuracy, no elastic deformations	1.0 - 1.5
Normal installation conditions	1.5 - 2.0
Shock and vibration, high-frequency reverse, significant elastic deformation	2.0 - 3.5
	Tab. 14

The ratio of the actual load to maximum permissible load may be as large as the reciprocal of the accepted safety factor, $\rm S_{o}$, at the most.

$$\frac{P_{0rad}}{C_{0rad}} \le \frac{1}{S_0} \qquad \frac{P_{0ax}}{C_{0ax}} \le \frac{1}{S_0} \qquad \frac{M_1}{M_x} \le \frac{1}{S_0} \qquad \frac{M_2}{M_y} \le \frac{1}{S_0} \qquad \frac{M_3}{M_z} \le \frac{1}{S_0}$$
Fig. 15

The above formulas are valid for a single load case.

If two or more forces are acting simultaneously, please check the following formula:

$$\frac{P_{0rad}}{C_{0rad}} + \frac{P_{0ax}}{C_{0ax}} + \frac{M_{1}}{M_{x}} + \frac{M_{2}}{M_{y}} + \frac{M_{3}}{M_{z}} + y \le \frac{1}{S_{0}}$$

P _{0rad}	= effective radial load (N)
C _{0rad}	= permissible radial load (N)
P _{0ax}	= effective axial load (N)
C _{Oax}	= permissible axial load (N)
$M_{1}^{}, M_{2}^{}, M_{3}^{}$	= external moments (Nm)
M_x, M_y, M_z	= maximum permissible moments
	in the different loading directions (Nm)
у	= reduction due to preload (see pg. MRR-10, Tab. 8)

Fig. 16


The safety factor ${\rm S_0}$ can lie on the lower given limit if the occurring forces can be determined with sufficient precision. If shock and vibration are

present, the higher value should be selected. For dynamic applications higher safety is required. Please contact Rollon technical support.

Slider load

Examples of formulas for determining the forces on the most heavily loaded slider

For an explanation of the parameters in the formulas see pg. MRR-17, fig.28.

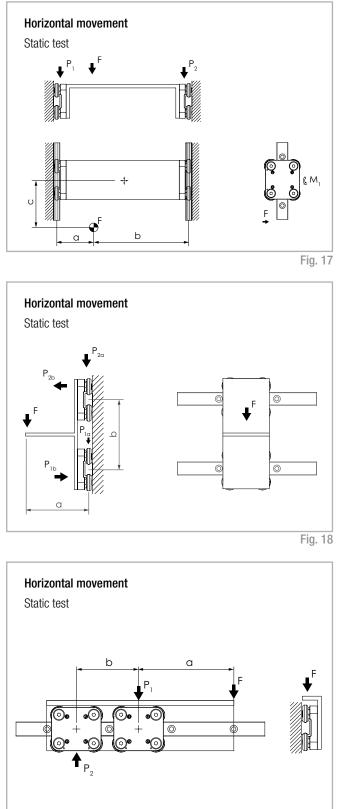

Slider load:

$$P_{1} = F \cdot \frac{b}{a+b}$$
$$P_{2} = F \cdot P_{1}$$

in addition each slider is loaded by a moment:

 $M_1 = \frac{F}{2} \cdot c$

Fig. 20

Slider load:

$$P_{1a} \cong P_{2a} = \frac{F}{2}$$
$$P_{2b} \cong P_{1b} = F \cdot \frac{a}{b}$$

Fig. 21




Fig. 19

 $P_{2} = F \cdot \frac{a}{b}$ $P_{1} = P_{2} + F$ Fig. 22

Note: Applies only if the distance between centers of the sliders $b > 2 \ensuremath{x}$ slider length

M R R

,

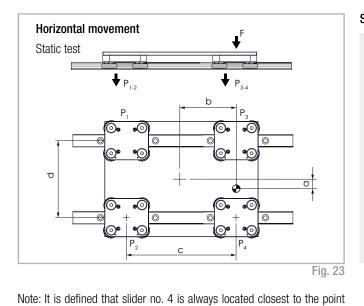

Slider load:





Fig. 25

where the force is applied.

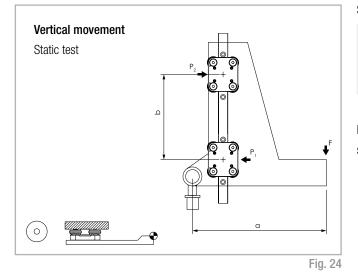

Slider load:

$$P_1 \cong P_2 = F \cdot \frac{a}{b}$$
 Fig. 26

Note: Applies only if the distance between centers of the sliders $b > 2 \ensuremath{x}$ slider length

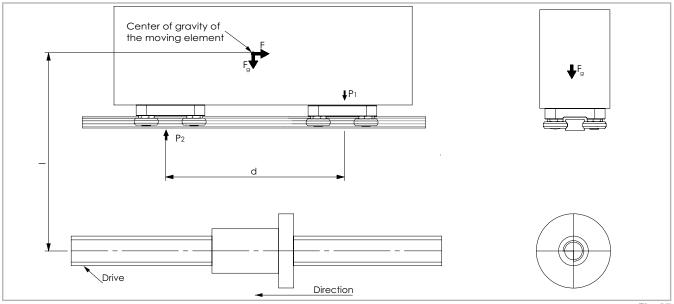


Fig. 27

Horizontal movement

Test with a moving element of the weight-force F_{g} at the instant the direc-

tion of movement changes

Inertial force	Slider load at time of reverse	
$F = m \cdot a$	$P_1 = \frac{F \cdot I}{d} + \frac{F_g}{2}$	$P_2 = \frac{F_g}{2} - \frac{F \cdot I}{d}$

Fig. 28

Explanation of the calculation formula

Fig. 29

Service life

The dynamic load capacity C is a conventional variable used for calculating the service life. This load corresponds to a nominal service life of 100 km. The following formula (see fig. 30) links the calculated theoretical service life to the dynamic load capacity and the equivalent load:

$$L_{\rm Km} = 100 \cdot \left(\frac{C}{P} \cdot \frac{f_{\rm c}}{f_{\rm i}} \cdot f_{\rm h}\right)^{\epsilon}$$

 L_{km} = theoretical service life (km) C = dynamic load capacity (N)

P = effective equivalent load (N)

 $f_c = contact factor$

f_i = application coefficient

 $f_h = stroke factor$


Fig. 30

The equivalent load P corresponds in its effects to the sum of the forces and moments working simultaneously on a slider. If these different load components are known, P results as follows:

$$P = P_r + \left(\frac{P_a}{C_{nax}} + \frac{M_1}{M_x} + \frac{M_2}{M_y} + \frac{M_3}{M_z} + y\right) \cdot C_{0rad}$$

Here the external loads are assumed as constant in time. Brief loads, which do not exceed the maximum load capacities, do not have any relevant effect on the service life and can therefore be neglected.

The contact factor f_c refers to applications in which several sliders pass the same rail section. If two or more sliders move over the same point of a rail, the contact factor according to table 15 to be taken into account in the formula for calculation of the service life.



y = reduction due to preload (see pg. MRR-10, Tab. 8)

Fig. 31


Calculation formulas

The application coefficient f_i takes into account the operational conditions in the service life calculation. It has a similar significance to the safety factor $S_{\rm o}$ in the static load test. It is calculated as described in the following table:


f	
Neither shocks nor vibrations, smooth and low-frequency direction change; clean operating conditions; low speeds (<1 m/s)	1.0 - 1.5
Slight vibrations, average speeds (1 - 2.5 m/s) and average frequency of direction change	1.5 - 2.0
Shocks and vibrations, high speeds (> 2.5 m/s) and high-frequency direction change; extreme dirt contamination	2.0 - 3.5


Tab. 16


The stroke factor $\rm f_h$ takes into account the higher load of the raceways and rollers during short strokes on the same total length of run. The corresponding values are taken from the following graph (for strokes longer than 1 m, $\rm f_h$ =1):

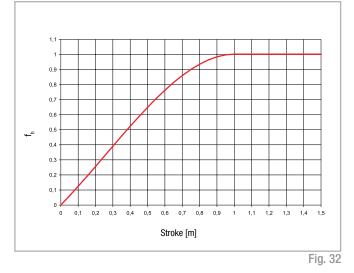


Guides suitable for all applications $// \sim$

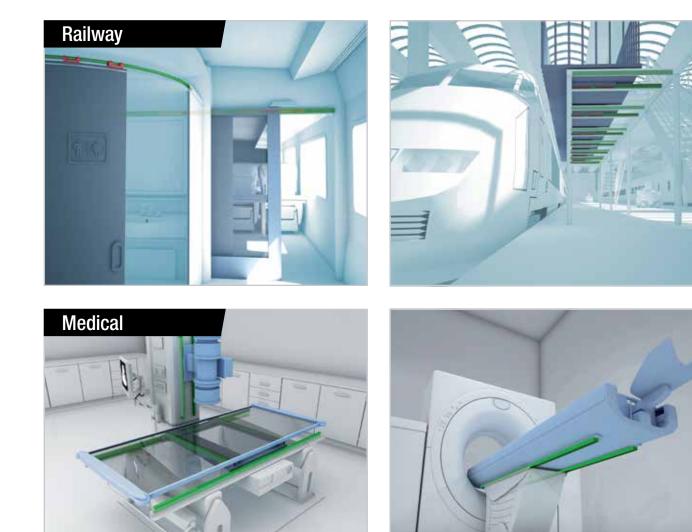

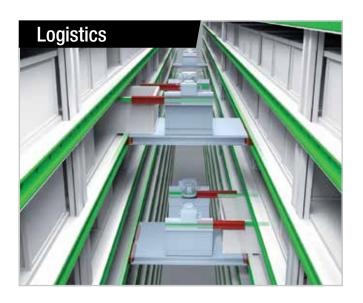
















TO SUPPORT YOU, WE DESIGN AND PRODUCE

Rollon's goal is to support you become **more competitive in your markets**, through technological solutions, design simplification, productivity, reliability, duration, and low maintenance.

We offer everything from **individual components to specifically designed**, mechanically integrated systems: the quality of our applications is an expression of our technology and competence.

ROLLONLAB: EXPERIMENTATION AND INNOVATION

RollonLab, a specialized laboratory where new products created by the R&D department are tested and optimized to perform beyond their technical limits through performance tests and strict quality controls.

RollonLab also tests products in simulations of different application scenarios, to guarantee that the client receives **highly competitive custom products.**

SUPPORT & CUSTOMIZATION

- Product training
- Custom product prototyping
- Application sizing and engineering
- 2D / 3D product drawings on demand
- On-site support for first installation and mock-ups
- Co-design service on sub-systems and full assemblies
- Internal laboratory for static abuse load and endurance tests


Thanks to the experience acquired through years of applications and research, we are able to provide high quality products specifically designed for your needs.





A NEW DIGITAL EXPERIENCE SURROUNDED BY ROLLON EXPERTS WHERE YOU CAN EASILY SELECT THE PRODUCT YOU NEED.

MY.ROLLON.COM

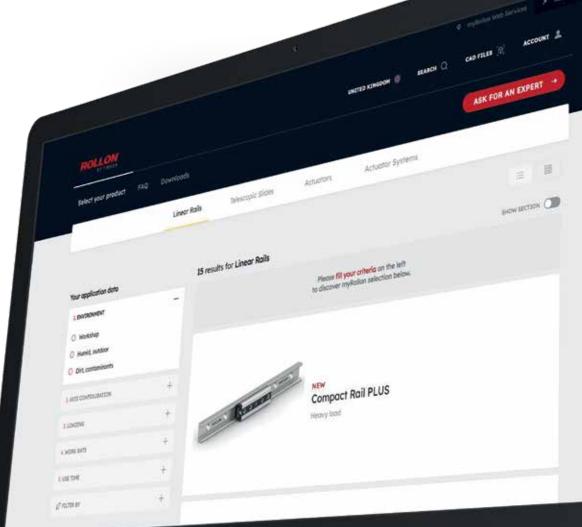





ROLLON S.p.A. - ITALY

Via Trieste 26 I-20871 Vimercate (MB) Phone: (+39) 039 62 59 1 www.rollon.com - infocom@rollon.com V

v

v

ROLLON Ltd - UK (Rep. Office)

The Works 6 West Street Olney Buckinghamshire, United Kingdom, MK46 5 HR Phone: +44 (0) 1234964024 www.rollon.uk.com - ukandireland@rollon.com

AMERICA

ROLLON Corporation - USA

101 Bilby Road. Suite B Hackettstown, NJ 07840 Phone: (+1) 973 300 5492 www.rollon.com - info@rolloncorp.com

ASIA

ROLLON Ltd - CHINA

No. 1155 Pang Jin Road, China, Suzhou, 215200 Phone: +86 0512 6392 1625 www.rollon.cn.com - info@rollon.cn.com

Consult the other ranges of products



All addresses of our global sales partners can also be found at www.rollon.com The content of this document and its use are subject to the general terms of sale of ROLLON available on the web site www.rollon.com Changes and errors expected. The text and images may be used only with our permission.

ROLLON GmbH - GERMANY

Bonner Strasse 317-319 D-40589 Düsseldorf Phone: (+49) 211 95 747 0 www.rollon.de - info@rollon.de

ROLLON S.A.R.L. - FRANCE

Les Jardins d'Eole, 2 allée des Séquoias F-69760 Limonest Phone: (+33) (0) 4 74 71 93 30 www.rollon.fr - infocom@rollon.fr

ROLLON - SOUTH AMERICA

101 Bilby Road. Suite B Hackettstown, NJ 07840 Phone: (+1) 973 300 5492 www.rollon.com - info@rolloncorp.com

ROLLON India Pvt. Ltd. - INDIA

39-42, Electronic City, Phase-I, Hosur Road, Bangalore-560100 www.rollonindia.in - info@rollonindia.in



〒252-0131 神奈川県相模原市緑区西橋本1-21-4 橋本屋ビル 電話番号:(+81)042-703-4101 www.rollon.jp - info@rollon.jp

Distributor

V

v

v

